



RADIO TEST REPORT

ETSI EN 300 220-1 V2.4.1(2012-05)

ETSI EN 300 220-2 V2.4.1(2012-05)

Product : Ajax LeaksProtect

Trade Name : AJAX

Model Name : Ajax LeaksProtect

Serial Model : N/A

Report No. : NTEK-2016NT09108864R

Prepared for

Ajax Systems Inc

910 Foulk Rd., Wilmington, DE 19803, United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

Table of Contents

	Page
1 . Summary Of Test Results	5
1.1 Test Facility	6
1.2 Measurement Uncertainty	6
2 . General Information	7
2.1 General Description Of EUT	7
2.2 Description Of Test Conditions	9
2.2.1 Test Conditions and Channel	10
2.3 Description Of Support Units	11
2.4 Equipments List For All Test Items	12
3 . Frequency error and frequency drift	13
3.1 Applied procedures / limit	13
3.1.1 Measuring Instruments and Setting	13
3.1.2 Test Procedures	14
3.1.3 Test Setup Layout	14
3.1.4 EUT Operation during Test	14
3.1.5 TEST RESULTS	15
4 . Effective radiated power	16
4.1 Applied procedures / limit	16
4.1.1 Measuring Instruments and Setting	16
4.1.2 Test Procedures	16
4.1.3 Test Setup Layout	17
4.1.4 EUT Operation during Test	17
4.1.5 TEST RESULTS	18
4.2 . Frequency stability under low voltage conditions	19
4.3 Applied procedures / limit	19
4.3.1 Measuring Instruments and Setting	19
4.3.2 Test Procedures	20
4.3.3 Test Setup Layout	20
4.3.4 EUT Operation during Test	20
4.3.5 TEST RESULTS	21
5 . Spurious emissions – Transmitter (25- 1000MHz)	22
5.1 Applied procedures / limit	22
5.1.1 Measuring Instruments and Setting	22
5.1.2 Test Procedures	22
5.1.3 Test Setup Layout	23
5.1.4 EUT Operation during Test	23
5.1.5 Results of Standby Mode Spurious Emissions	23

Table of Contents

	Page
5.1.6 TEST RESULTS (25MHz ~ 1000MHz)	24
6 . Spurious emissions – Transmitter (Above 1000MHZ)	25
6.1 Applied procedures / limit	25
6.1.1 Measuring Instruments and Setting	25
6.1.2 Test Procedures	26
6.1.3 Test Setup Layout	26
6.1.4 EUT Operation during Test	27
6.1.5 Results of Standby Mode Spurious Emissions	27
6.1.6 TEST RESULTS	28
7 . Duty cycle	29
7.1 Applied procedures / limit	29
7.1.1 TEST RESULTS	29
8 . Transient power	30
8.1 Applied procedures / limit	30
8.1.1 Test Procedures	30
8.1.2 Test Result	31
9 . Adjacent channel power	32
9.1 Applied procedures / limit	32
9.2 Test Procedures	32
9.3 Test Result	32
10 . Modulation bandwidth	33
11 . Blocking	37
12 . Spurious emissions – Receiver (30-1000MHz)	39
12.1 Applied procedures / limit	39
12.1.1 Measuring Instruments and Setting	39
12.1.2 Test Procedures	39
12.1.3 Test Setup Layout	39
12.1.4 EUT Operation during Test	39
12.1.5 TEST RESULTS (25MHz-1000MHz)	40
13 . Spurious emissions – Receiver (above 1000MHz)	41
13.1 Applied procedures / limit	41
13.1.1 Measuring Instruments and Setting	41
13.1.2 Test Procedures	41
13.1.3 Test Setup Layout	41
13.1.4 EUT Operation during Test	41
13.1.5 TEST RESULTS (Above 1000MHz)	42

APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

1. Summary Of Test Results

Test procedures according to the technical standards:

ETSI EN 300 220-1 V2.4.1 (2012-05)

ETSI EN 300 220-2 V2.4.1 (2012-05)

Clause	Description of Test Item	Results(Pass/Fail)	N.T(Not Test)
Transmitter Parameters			
7.1	Frequency error and frequency drift		N.T
7.2	Average power		N.T
7.3	Effective radiated power	Pass	
7.4	Spread spectrum modulation		N.T
7.5	Transient power	Pass	
7.6	Adjacent channel power		N.T
7.7	Modulation bandwidth	Pass	
7.8	spurious emissions	Pass	
7.9	Frequency stability under low-voltage conditions		N.T
7.10	Duty cycle	Pass	
7.11	Time-out-timer		N.T
Receiver Parameters			
8.1	Receiver sensitivity		N.T
8.2	Receiver LBT threshold		N.T
8.3	Adjacent channel selectivity		N.T
8.4	Blocking		
8.5	Spurious response rejection		N.T
8.6	Receiver spurious radiation		

1.1 Test Facility

NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China

FCC Registered No.: 791972 IC Registered No.:9270A-1

CNAS Registration No.:L5516

1.2 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. General Information

2.1 General Description Of EUT

Equipment	Ajax LeaksProtect	
Brand Name	AJAX	
Model Name.	Ajax LeaksProtect	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is Ajax LeaksProtect	
	Operation Frequency:	868MHz
	Channel number	1 channel
	Modulation Type:	FSK
	Antenna Gain(Peak)	-10dBi
	Antenna Designation:	Built-in helical antenna
	Receiver Classification:	Class 3
	Power Rating:	DC 3V
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.		
Channel List	Refer to below	
Adapter	N/A	
Battery	DC 1.5V*2 AAA	
Hardware Version	N/A	
Software Version	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. This device power supply is supplied by a power generation mechanism, tested using an adjustable power supply 5V voltage test.


2.

TX

Channel	Frequency (MHz)
01	868
--	--

2.2 Description Of Test Conditions

1. Block diagram of transmitter



2.2.1 Test Conditions and Channel

TX Test Conditions	Normal Test Conditions	Extreme Test Conditions
Temperature	25°C	-20°C - 50°C
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 3.0V	DC 2.7-3.5V

Note:

- (1) For tests at extreme temperatures, measurements shall be made in accordance with the procedures specified in clause 5.4.1.2, at the upper and lower temperatures of the range as follow: temperature: -20°C - 50°C;
- (2) For the Leclanché or lithium type battery: 0.85 times the nominal voltage of the battery; for the mercury or nickel-cadmium type of battery: 0.9 times the nominal voltage of the battery. In both cases, the upper extreme test voltage shall be 1.15 times the nominal voltage of the battery.
The upper extreme voltage shall be declared by the equipment provider if different from the nominal voltage.
- (3) The measurements are performed at the highest, middle, lowest available channels.

2.3 Description Of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Ajax LeaksProtect	AJAX	Ajax LeaksProtect	N/A	TX

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.4 Equipments List For All Test Items

Item	EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESPI7	101318	2017.06.27
2	Bilog Antenna	TESEQ	CBL6111D	31216	2017.08.23
3	Turn Table	EM	SC100_1	60531	N/A
4	Antnna Mast	EM	SC100	N/A	N/A
5	Horn Antenna	EM	EM-AH-1018 0	2011071402	2017.08.23
6	HF Cable	N/A	R-01	N/A	2017.06.27
7	HF Cable	N/A	R-02	N/A	2017.06.27
8	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2017.06.27
9	LF Cable	N/A	R-03	N/A	2017.06.27
10	Broadband Preamplifier	SCHWARZB ECK	BBV9718	9718-218	2016.12.24
11	Pre-Amplifier	EM	EM30180	60538	2016.12.24
12	Spectrum Analyzer	Agilent	E4407B	MY45108040	2017.06.27
13	Filter	TRILTHIC	2400MHz	29	2016.11.18
14	Attenuator	Weinschel	33-10-33	AR4010	2016.11.18
15	Attenuator	Weinschel	24-20-34	BP4485	2016.11.18
16	Spectrum Analyzer	Agilent	E4440A	MY46186938	2016.11.18
17	ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2017.06.27
18	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2017.08.07
19	Power Splitter	Mini-Circuits	ZN2PD-63-S +	SF02510142 8	2016.12.08
20	Coupler	Mini-Circuits	ZADC-10-63- S+	SF79410141 0	2016.12.08
21	Cable	N/A	RF-01	N/A	2016.11.18
22	Cable	N/A	RF-02	N/A	2016.11.18
23	Power Splitter	Mini-Circuits/ USA	ZN2PD-63-S +	SF02510142 8	2016.12.08
24	Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2017.08.12
25	Attenuator	Agilent	8495B	MY42147029	2016.11.19
26	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2016.11.18
27	Passive Loop Antenna	ETS-LINDGE REN	6512	165355	2016.12.23
28	Power Meter	Agilent	E4419B	MY45102538	2017.07.30
29	Power Sensor	Agilent	E9301A	MY41495644	2017.07.30
30	Power Sensor	Agilent	E9301A	US39212148	2017.07.30

3. Frequency error and frequency drift

3.1 Applied procedures / limit

The frequency error and drift shall not exceed the values given in table 1 or 2 under normal and extreme conditions.

Table 1: Frequency error for systems with channel spacings of less than or equal to 25 kHz

Channelization	Frequency error limit (kHz)				
	47 MHz	47 MHz to 137 MHz	137 MHz to 300 MHz	300 MHz to 500 MHz	500 MHz to 1000 MHz
Channelized systems	±10	±10	±10	±12	±12.5

Note : For equipment having a channel spacing of 12,5 kHz or less, the frequency error limit shall not exceed 50 % of the channel spacing.50 % of the channel spacing.

Table 2: Frequency error for all other systems

Operating frequency	Frequency error limit (ppm),seenote
≤ 1 000 MHz	±100

NOTE: The frequency error measured shall not exceed the designated frequency band.

3.1.1 Measuring Instruments and Setting

The following table is the setting of Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	10~20dB
Span Frequency	500kHz
RB	10 kHz
VB	30 kHz
Detector	Peak
Trace	Peak 50 sweeps

3.1.2 Test Procedures

- a) Connected the antenna port to the Spectrum Analyzer via a Attenuator,
- b) Set center frequency of spectrum analyzer = operating carrier frequency.

set the Spectrum Analyzer as below:

Resolution BW: 10 kHz


Video BW: 30 kHz

Span: 500 kHz

- c) When the trace completed, find the peak value of the power envelope and record the frequency.

The above procedure shall be performed at normal and extreme test conditions. d. The measurement shall be repeated at the lowest, the middle, and the highest channel of the stated frequency range. These measurements shall also be performed at normal and extreme test conditions.

3.1.3 Test Setup Layout

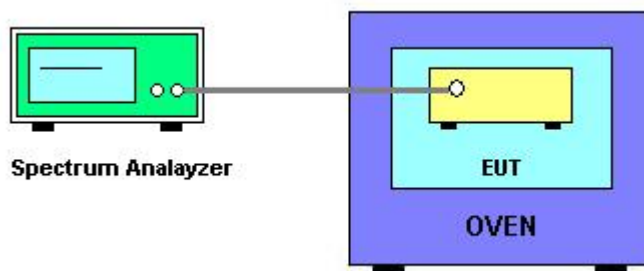

3.1.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.1.5 TEST RESULTS

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	N/A
Test Mode :	N/A		

Note: the equipment is not capable of producing an unmodulated carrier.

4. Effective radiated power

4.1 Applied procedures / limit

Frequency Bands/frequencies	Applications	Maximum radiated power, e.r.p. / power spectral density	Channel spacing	Spectrum access and mitigation requirement (e.g. Duty cycle or LBT + AFA)
26,995 MHz, 27,045 MHz, 27,095 MHz, 27,145 MHz, 27,195 MHz 34,995 MHz to 35,225 MHz 40,665 MHz, 40,675 MHz, 40,685 MHz, 40,695 MHz	Model control	100 mW	10 kHz 10 kHz 10 kHz	No restriction
26,957 MHz to 27,283 MHz	Non-specific use	10 mW	No requirement	No restriction
40,660 MHz to 40,700 MHz	Non-specific use	10 mW	No requirement	No restriction
138,200 MHz to 138,450 MHz	Non-specific use	10 mW	No requirement	1 % (see note 3)
169,400 MHz to 169,475 MHz	Tracking and tracing	500 mW	≤50 kHz	1 % (see note 3)
169,400 MHz to 169,475 MHz	Meter Reading	500 mW	≤50 kHz	10 %
169,475 MHz to 169,4875 MHz	Social alarms	10 mW	12,5 kHz	0,1 %
169,5875 MHz to 169,6000 MHz	Social alarms	10 mW	12,5 kHz	0,1 %
433,050 MHz to 434,790 MHz (see note 4)	Non-specific use	10 mW	No requirement	10 % (see note 3)

4.1.1 Measuring Instruments and Setting

The following table is the setting of the power meter.


Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	25 MHz
Stop Frequency	1000 MHz
Detector	Positive Peak
Sweep Time	Auto
RB / VB	100 kHz/100 kHz

4.1.2 Test Procedures

EUT was placed on a 1.5m outdoor wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produced a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB E.I.R.P. or ERP.

4.1.3 Test Setup Layout

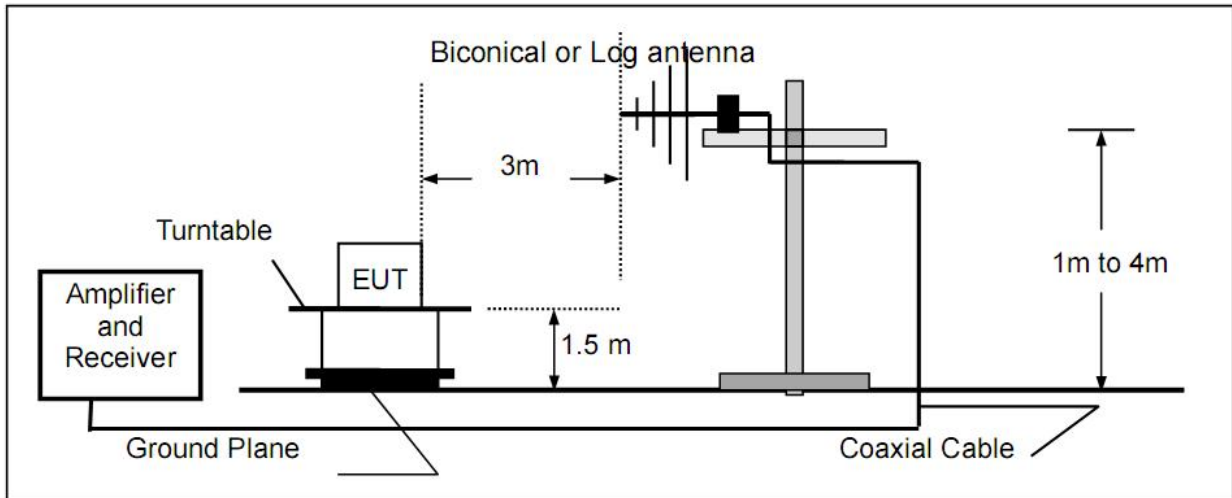

4.1.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.1.5 TEST RESULTS

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX Mode		

Frequency	Ant	Reading	S.G.	ERP factor	Measure Result	Measure Result	Limits	RESULT
(MHz)	H / V	(dBm)	(dBm)	(dB)	(dBm)	(mW)	(mW)	
868	H	-27.36	17.09	41.26	-3.19	0.48	10	PASS
868	V	-30.69	15.88	40.76	-5.81	0.30	10	PASS

Note: Measure Result (dBm) = Reading (dBm) + ERP Factor (dB) - S.G. (dBm)

4.2. Frequency stability under low voltage conditions

4.3 Applied procedures / limit

This test is for battery operated equipment only.

The equipment shall either:

- a) remain on channel, for channelized equipment within the limits stated in clause 5.1.1 , or within the assigned operating frequency band, for non-channelized equipment, whilst the radiated or conducted power is greater than the spurious emission limits; or
- b) the equipment cease to function below the providers declared operating voltage.

4.3.1 Measuring Instruments and Setting

The following table is the setting of Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	10~20dB
Span Frequency	500kHz
RB	10 kHz
VB	30 kHz
Detector	Peak
Trace	Peak 50 sweeps

4.3.2 Test Procedures

- a) Connected the antenna port to the Spectrum Analyzer via a Attenuator,
- b) Set center frequency of spectrum analyzer = operating carrier frequency.

set the Spectrum Analyzer as below:

Resolution BW: 10 kHz


Video BW: 30 kHz

Span: 500 kHz

- c) When the trace completed, find the peak value of the power envelope and record the frequency.

The above procedure shall be performed at normal and extreme test conditions. d. The measurement shall be repeated at the lowest, the middle, and the highest channel of the stated frequency range. These measurements shall also be performed at normal and extreme test conditions.

4.3.3 Test Setup Layout

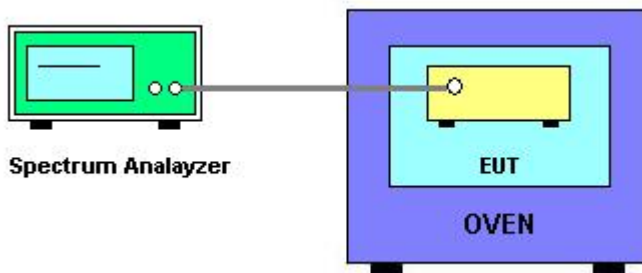

4.3.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.5 TEST RESULTS

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	N/A
Test Mode :	TX Mode		

Supply Voltage	Measured Frequency[MHz]	Frequency Error(ppm)
V _{nom}	868.012	39.35
V _{nom} -10%	868.017	52.33
V _{nom} -20%	868.015	47.65
V _{nom} -30%	Function lose	
Limit	±100ppm	
Result	Pass	

5. Spurious emissions – Transmitter (25- 1000MHz)

5.1 Applied procedures / limit

State	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
Operating	4 nW /-54dBm	250 nW/-36dBm	1 μW /-30dBm
Standby	2 nW /-57dBm	2 nW /-57dBm	20 nW /-47dBm

5.1.1 Measuring Instruments and Setting

The following table is the setting of the Spectrum Analyzer.


Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	25 MHz
Stop Frequency	1000 MHz
Detector	Positive Peak
Sweep Time	Auto
RB / VB	100 kHz/100 kHz

5.1.2 Test Procedures

- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. This measurement shall be repeated with the transmitter in standby mode where applicable.
- d. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable.
- e. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- f. Replace the EUT by standard antenna and feed the RF port by signal generator.
- g. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- h. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- i. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- j. If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.
- k. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

5.1.3 Test Setup Layout

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

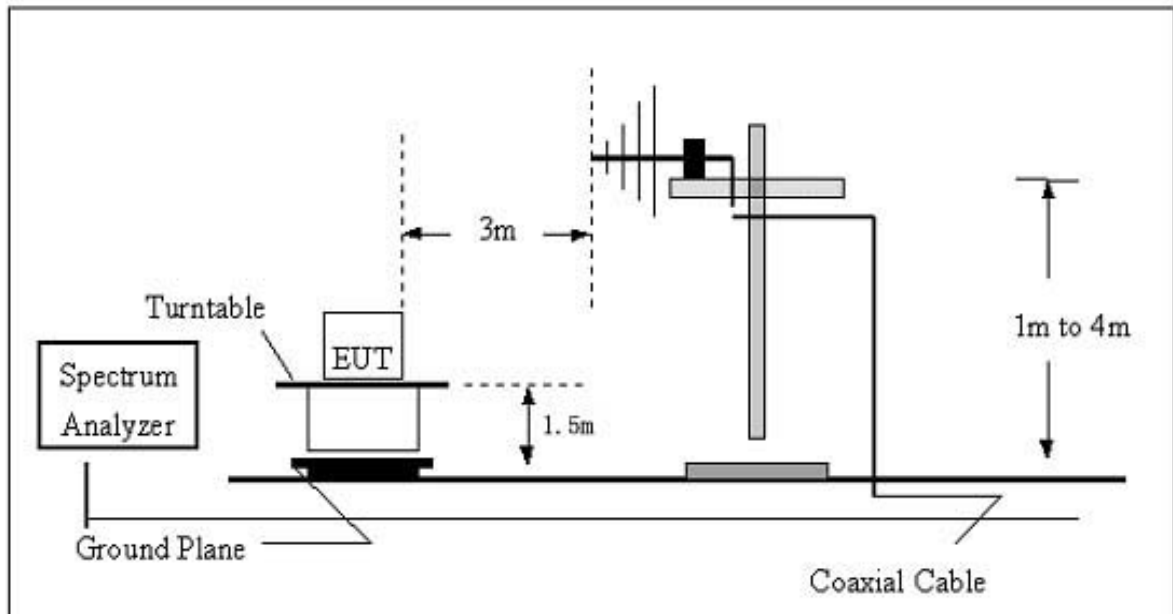

5.1.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.5 Results of Standby Mode Spurious Emissions

For the initial investigation on standby mode and receiving mode, no significant differences in spurious emissions were observed between these 2 modes. So test data for standby mode was omitted in this section.

5.1.6 TEST RESULTS (25MHz ~ 1000MHz)

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	63.5587	-85.33	5.75	-76.68	-54	-22.68	peak
V	72.4875	-84.26	8.65	-74.5	-54	-20.5	peak
V	77.6985	-87.25	9.76	-75.41	-36	-39.41	peak
V	154.2365	-87.36	11.84	-75.47	-36	-39.47	peak
V	197.6584	-83.36	11.89	-65.92	-54	-11.92	peak
V	853.2456	-85.44	17.44	-66.78	-54	-12.78	peak
H	33.2545	-86.36	18.66	-77.05	-36	-41.05	peak
H	71.2259	-88.41	9.31	-77.83	-54	-23.83	peak
H	153.2665	-90.23	10.58	-78.85	-36	-42.85	peak
H	187.6987	-87.36	11.38	-75.97	-54	-21.97	peak
H	206.2362	-79.58	11.39	-64.76	-54	-10.76	peak
H	881.2369	-77.65	14.82	-77.65	-36	-41.65	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

6. Spurious emissions – Transmitter (Above 1000MHZ)

6.1 Applied procedures / limit

State	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
Operating	4 nW /-54dBm	250 nW/-36dBm	1 μW /-30dBm
Standby	2 nW /-57dBm	2 nW /-57dBm	20 nW /-47dBm

6.1.1 Measuring Instruments and Setting

The following table is the setting of the Spectrum Analyzer.


Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier frequency
Detector	Positive Peak
Sweep Time	Auto
RB / VB	1 MHz / 1 MHz

6.1.2 Test Procedures

- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. This measurement shall be repeated with the transmitter in standby mode where applicable.
- d. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable.
- e. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- f. Replace the EUT by standard antenna and feed the RF port by signal generator.
- g. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- h. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- i. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- j. If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.
- k. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

6.1.3 Test Setup Layout

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

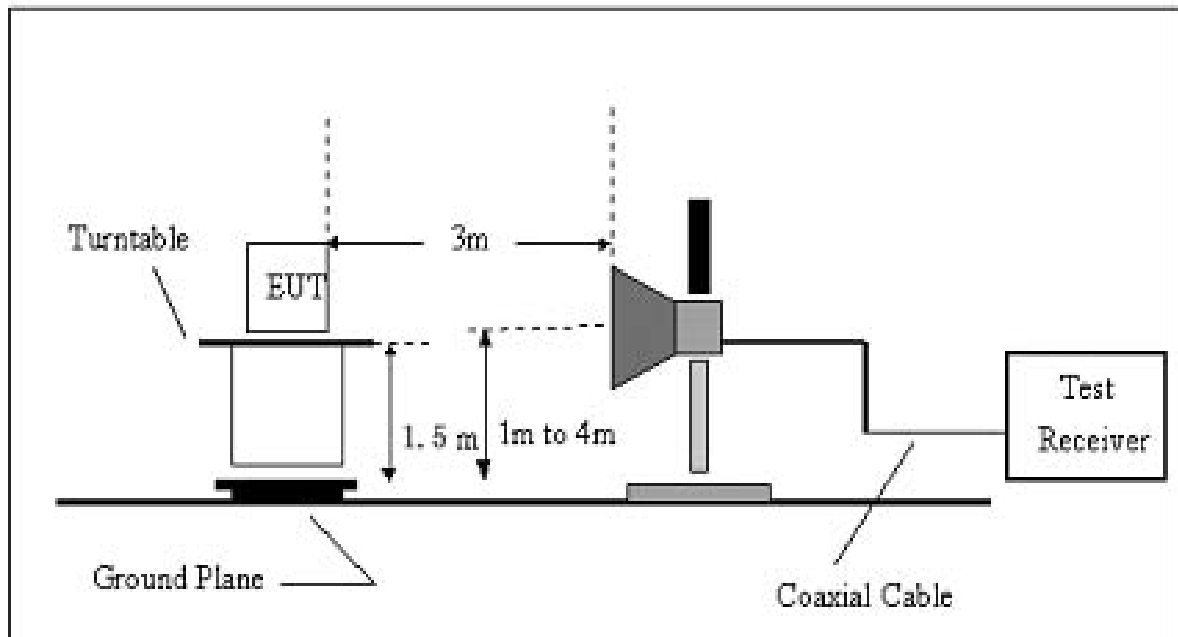

6.1.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.1.5 Results of Standby Mode Spurious Emissions

For the initial investigation on standby mode and receiving mode, no significant differences in spurious emissions were observed between these mode. So test data for standby mode was omitted in this section.

6.1.6 TEST RESULTS

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1222.51	-62.33	-4.92	-67.25	-30	-37.25	peak
V	1648.56	-62.98	-1.84	-64.82	-30	-34.82	peak
V	2225.15	-64.22	-1.27	-65.49	-30	-35.49	peak
V	2889.33	-64.48	7.58	-56.9	-30	-26.9	peak
V	3341.87	-67.26	8.75	-58.51	-30	-28.51	peak
V	4526.35	-58.36	9.68	-48.68	-30	-18.68	peak
H	1236.33	-65.33	-5.62	-70.95	-30	-40.95	peak
H	2369.58	-64.89	-1.65	-66.54	-30	-36.54	peak
H	2852.25	-66.85	3.69	-63.16	-30	-33.16	peak
H	3963.87	-64.23	5.32	-58.91	-30	-28.91	peak
H	4655.22	-64.88	9.68	-55.2	-30	-25.2	peak
H	5411.28	-68.23	14.3	-53.93	-30	-23.93	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

7. Duty cycle

7.1 Applied procedures / limit

In a period of 1 hour the duty cycle shall not exceed the class values given in table 13.

Table 13: Duty cycle class

Duty cycle class	Duty cycle ratio
1	0,1 %
2	1,0 %
3	10 %
4	Up to 100 %

7.1.1 TEST RESULTS

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Normal Test Voltage :	DC 3.0V
Test Mode :	TX		

Test Result

Duty Cycle	Limit	Result
Class 3	10%	Complies

The duty cycle is simply the on time divided by the period:

The duration of one cycle = 64.25ms

$T_{ON(1\text{ hop})1}=0.743\text{ms}$, $T_{ON(1\text{ hop})2}=1\text{ms}$, $T_{ON(1\text{ hop})3}=1.135\text{ms}$

$T_{ON}=0.743*13+1*15+1.135*1=25.794\text{ms}$

$T_{on}(\text{total})=25.794 *10000=257940\text{ms}$

$T_p = \text{one hour}=3600000\text{ms}$, $\text{Duty Cycle} = T_{on}/T_p = 257940/3600000 * 100\% = 7.17\%$

Note: Customer declared when the number of transmitting is less than 10000 Per hour, the duty cycle of EUT is less than 10%.

This product is manually pressed to launch a cycle of waveform 2.8ms (Tx on + Tx off), to assess the most pressing one hour 15,000 times, the power supply of the product is pressed, it then must click once again there will be a next time launch is not continuously transmitted.

8. Transient power

8.1 Applied procedures / limit

At all frequencies where the emission levels measured in step 1 exceed the spurious domain limits (clause 7.8.3), the power level measured in step 1 shall not exceed the power level measured in Step 2 by more than 3 dB.

8.1.1 Test Procedures

Step 1

The transmitter shall be operated with powering on and off (e.g. by switching between active and standby state) at least 5 times within a maximum period of 60 seconds. The recommended powering on- and off-time is at least 1 s respectively. If other on- and off-times are used, this shall be stated in the test report.

The measured power level shall be recorded for the measurement period covering at least 5 powering on and off events for the measurement receiver setting above and below the wanted channel.

If the resulting maximum power level in step 1 is above the spurious domain limit (clause 7.8.3), the second measurement step shall be performed.

Step 2

In the second measurement, the procedure shall be repeated with the same settings of the measuring receiver, whereas

the transmitter shall be set on continuous transmission. If this is not possible, the measurements shall be carried out in a period shorter than the duration of the modulated transmitted burst.

The measured power level shall be recorded for the measurement period identical to the one in step 1 for the measurement receiver setting above and below the wanted channel.

Measurement step 1 shall be repeated within the spectrum mask every 120 kHz from the primarily adjusted point to both sides of the wanted frequencies, until either it is clearly ascertained that no power increases or limit exceeding appear, or until the frequency offset to the wanted frequency exceeds 2 MHz.

8.1.2 Test Result

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	TX		

Channel Spacing (times)	Step 1 (dBm)	Step 2 (dBm)	Δ (Step 1-Step2) dB	Limit dB	Results (P/F)
1	-9.252	-8.23	1.022	3	PASS
2	-9.123	-8.32	0.803	3	PASS
3	-9.369	-8.15	1.219	3	PASS
4	-9.214	-7.95	1.264	3	PASS
5	-9.189	-8.11	1.079	3	PASS

9. Adjacent channel power

9.1 Applied procedures / limit

These measurements are applicable to narrowband systems.

Adjacent channel power limits applicable to narrowband systems

	Channel separation < 20 kHz	Channel separation ≥ 20 kHz
Normal test conditions	10 μW	200 nW
Extreme test conditions	32 μW	640 nW
NOTE: These limits also apply to spread spectrum equipment.		

9.2 Test Procedures

- a) The transmitter shall be operated at the carrier power determined under normal test conditions.
The output of the transmitter shall be linked to the input of the "receiver" by a connecting device such that the impedance presented to the transmitter is 50 Ω and the level at the "receiver input" is appropriate
- b) With the transmitter unmodulated, the tuning of the "receiver" shall be adjusted so that a maximum response is obtained. This is the 0 dB response point. The "receiver" attenuator setting and the reading of the meter shall be recorded. If an unmodulated carrier cannot be obtained, then the measurement shall be made with the transmitter modulated with the normal test signal as appropriate, in which case this fact shall be recorded in test reports.
- c) The transmitter shall be modulated by a normal test signal as appropriate.
- d) The "receiver" variable attenuator shall be adjusted to obtain the same meter reading as in step b), or a known relation to it.
- e) The ratio of the adjacent channel power to the carrier power is the difference between the attenuator settings in steps b) and d), corrected for any differences in the reading of the meter.

9.3 Test Result

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Test Voltage :	N/A
Test Mode :	N/A		

Note: These measurements are applicable to narrowband systems.

10. Modulation bandwidth

10.1 Applied procedures / limit

Emission Limits of the modulated signal

Reference Bandwidth (RBW)	Limit	Lower envelope point minimum frequency	Upper envelope point maximum frequency
1 kHz	1 uW	fe, lower	fe, upper
1 kHz	250 nW	(fe, lower - 200 kHz)	(fe, upper + 200 kHz)
10 kHz	250 nW	(fe, lower - 400 kHz)	(fe, upper + 400 kHz)
100 kHz	250 nW	(fe, lower - 1 000 kHz)	(fe, upper + 1000kHz)

In table , fe,lower and fe,upper are the lower and upper edges of the band in which the equipment operates.

10.2 Measuring Instruments and Setting

Spectrum Analyzer	Setting
Attenuation	Auto
Detector	Positive Peak
Sweep Time	Auto
RB	1KHZ, 10KHZ, 100KHZ
VB	3RB

10.3 Test Procedures

In clauses 7.2 or 7.3

10.4 Test Result

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Normal Test Voltage :	DC 3.0V
Test Mode :	TX		

Test Conditions :
TNVN

Upper envelope point maximum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, upper + 200 kHz)	-58.41	-30dBm	1KHz	PASS
(fe, upper + 400 kHz)	-58.25	-36dBm	10KHz	PASS
(fe, upper + 1 000 kHz)	-55.26	-36dBm	100KHz	PASS
> (fe, upper + 1 000 kHz)	-56.38	-36dBm	100KHz	PASS

Lower envelope point minimum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, lower - 200 kHz)	-56.59	-30dBm	1KHz	PASS
(fe, lower - 400 kHz)	-56.40	-36dBm	10KHz	PASS
(fe, lower - 1 000 kHz)	-59.35	-36dBm	100KHz	PASS
< (fe, lower - 1 000 kHz)	-60.49	-36dBm	100KHz	PASS

THVH

Upper envelope point maximum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, upper + 200 kHz)	-56.57	-30dBm	1KHz	PASS
(fe, upper + 400 kHz)	-58.53	-36dBm	10KHz	PASS
(fe, upper + 1 000 kHz)	-59.40	-36dBm	100KHz	PASS
> (fe, upper + 1 000 kHz)	-58.38	-36dBm	100KHz	PASS

Lower envelope point minimum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, lower - 200 kHz)	-55.53	-30dBm	1KHz	PASS
(fe, lower - 400 kHz)	-56.69	-36dBm	10KHz	PASS
(fe, lower - 1 000 kHz)	-57.34	-36dBm	100KHz	PASS
< (fe, lower - 1 000 kHz)	-60.22	-36dBm	100KHz	PASS

TLVL

Upper envelope point maximum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, upper + 200 kHz)	-57.36	-30dBm	1KHz	PASS
(fe, upper + 400 kHz)	-55.57	-36dBm	10KHz	PASS
(fe, upper + 1 000 kHz)	-58.33	-36dBm	100KHz	PASS
> (fe, upper + 1 000 kHz)	-56.75	-36dBm	100KHz	PASS

Lower envelope point minimum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, lower - 200 kHz)	-58.38	-30dBm	1KHz	PASS
(fe, lower - 400 kHz)	-57.52	-36dBm	10KHz	PASS
(fe, lower - 1 000 kHz)	-56.39	-36dBm	100KHz	PASS
< (fe, lower - 1 000 kHz)	-64.85	-36dBm	100KHz	PASS

THVL

Upper envelope point maximum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, upper + 200 kHz)	-58.43	-30dBm	1KHz	PASS
(fe, upper + 400 kHz)	-56.35	-36dBm	10KHz	PASS
(fe, upper + 1 000 kHz)	-55.48	-36dBm	100KHz	PASS
> (fe, upper + 1 000 kHz)	-58.49	-36dBm	100KHz	PASS

Lower envelope point minimum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, lower - 200 kHz)	-57.36	-30dBm	1KHz	PASS
(fe, lower - 400 kHz)	-56.74	-36dBm	10KHz	PASS
(fe, lower - 1 000 kHz)	-55.59	-36dBm	100KHz	PASS
< (fe, lower - 1 000 kHz)	-58.41	-36dBm	100KHz	PASS

TLVH

Upper envelope point maximum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, upper + 200 kHz)	-58.36	-30dBm	1KHz	PASS
(fe, upper + 400 kHz)	-60.35	-36dBm	10KHz	PASS
(fe, upper + 1 000 kHz)	-57.49	-36dBm	100KHz	PASS
> (fe, upper + 1 000 kHz)	-58.40	-36dBm	100KHz	PASS

Lower envelope point minimum frequency	Max Vaule (dBm)	Limit	Reference Bandwidth (RBW)	Result
(fe, lower - 200 kHz)	-56.38	-30dBm	1KHz	PASS
(fe, lower - 400 kHz)	-57.74	-36dBm	10KHz	PASS
(fe, lower - 1 000 kHz)	-56.22	-36dBm	100KHz	PASS
< (fe, lower - 1 000 kHz)	-58.75	-36dBm	100KHz	PASS

11. Blocking


11.1 Applied procedures / limit

Receiver category	Frequency offset	Limit
1	±2 MHz	≥ 84 dB -A (note 2)
2	±2 MHz	≥ 35 dB -A (note 2)
3	±2 MHz	≥ 24 dB -A (note 2)
1	±10 MHz	≥ 84 dB -A (note 2)
2	±10 MHz	≥ 60 dB -A (note 2)
3	±10 MHz	≥ 44 dB -A (note 2)

NOTE 1: The limits apply also for the repeated tests in case of equipment using LBT or category 1 receivers, reduced by 13 dB or 40 dB, respectively, to account for the increased wanted signal level.

NOTE 2: $A = 10 \log (BW_{kHz} / 16 \text{ kHz})$ BW is the receiver bandwidth.

11.2 Method of measurement

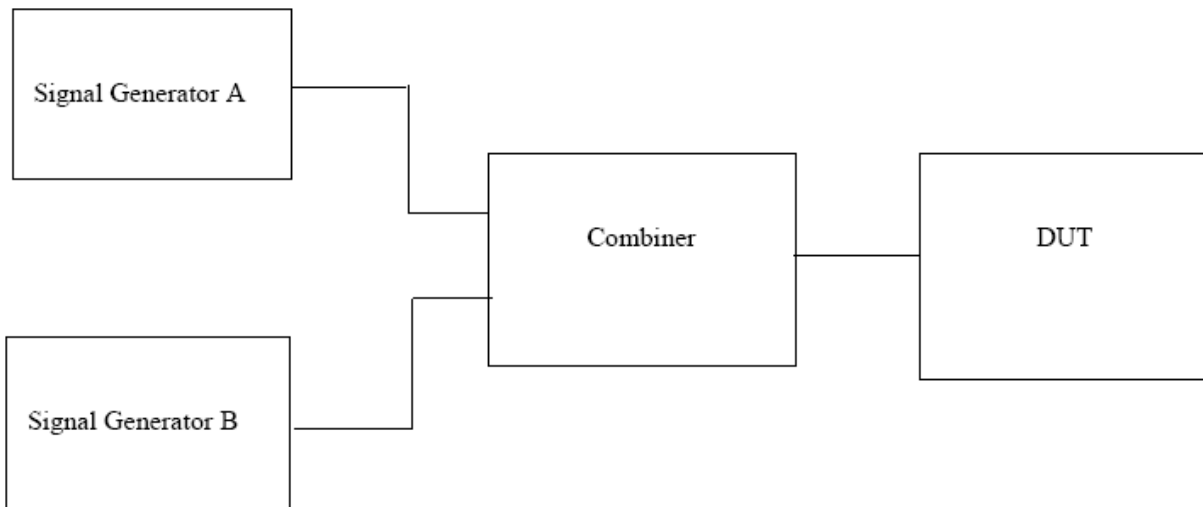

11.3 Test Procedures

In clauses EN 300 220-1 8.4.2

11.4 Test Result:
N/A

12. Spurious emissions – Receiver (30-1000MHz)

12.1 Applied procedures / limit

Clause	Test Item	Frequency(MHz)	Limit
4.3.5	Spurious emissions	25-1000	-57dBm
	(radiated)	Above 1000	-47dBm

12.1.1 Measuring Instruments and Setting

The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	25 MHz
Stop Frequency	1000 MHz
Detector	Positive Peak
Sweep Time	Auto
RB / VB	100 kHz/100 kHz

12.1.2 Test Procedures

- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. .
- d. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- e. Replace the EUT by standard antenna and feed the RF port by signal generator.
- f. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- g. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- h. The level of the spurious emission is the power level of (7) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- i. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

12.1.3 Test Setup Layout

This test setup layout is the same as that shown in section 5.1.3

12.1.4 EUT Operation during Test

The EUT was programmed to be in continuously receiving mode.

12.1.5 TEST RESULTS (25MHz-1000MHz)

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	N/A		

13. Spurious emissions – Receiver (above 1000MHz)

13.1 Applied procedures / limit

Clause	Test Item	Frequency(MHz)	Limit
4.3.5	Spurious emissions	25-1000	-57dBm
	(narrowband)	Above 1000	-47dBm

13.1.1 Measuring Instruments and Setting

Please refer to section 9.1.1 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	12750 MHz
Detector	Positive Peak
Sweep Time	Auto
RB / VB	1MHz / 1MHz

13.1.2 Test Procedures

- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. .
- d. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- e. Replace the EUT by standard antenna and feed the RF port by signal generator.
- f. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- g. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- h. The level of the spurious emission is the power level of (7) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- i. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

13.1.3 Test Setup Layout

This test setup layout is the same as that shown in section 6.1.3

13.1.4 EUT Operation during Test

The EUT was programmed to be in continuously receiving mode.

13.1.5 TEST RESULTS (Above 1000MHz)

EUT :	Ajax LeaksProtect	Model Name :	Ajax LeaksProtect
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	N/A		

Radiated Measurement Photos

